


**SAFETY & COMPLIANCE**

Read all instructions and safety information before use.  
For important safety and regulatory compliance information, see the Installation and User Guide. ([www.saveiteasy.co.uk/downloads/installation-guides](http://www.saveiteasy.co.uk/downloads/installation-guides))

Applicable products : PRO-5-036 / PRO-5-039

**PRODUCT AND PARTS**

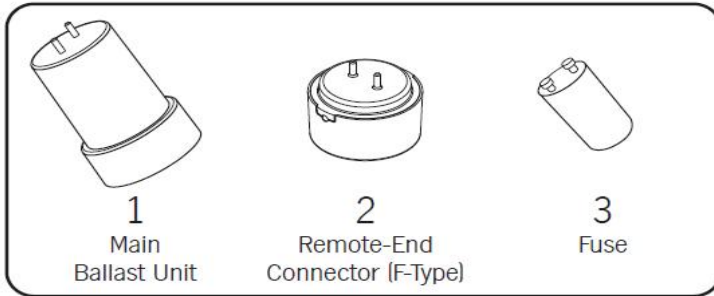


These instructions only apply to installation in standard switch-start fittings. For any other situations (quick start, electronic, emergency or any form of lighting control or sensors), please contact your local dealer for technical support or visit: [www.saveiteasy.co.uk/downloads/installation-guides](http://www.saveiteasy.co.uk/downloads/installation-guides)




**Professional**  
The Ultimate Plug & Save e-Ballast

**SIMPLE SETUP**


- 1) Connect the Main Ballast Unit to one side of the T5 lamp (the side with printing on the glass), and then connect the Remote-End Connector to the other side of the T5 lamp.

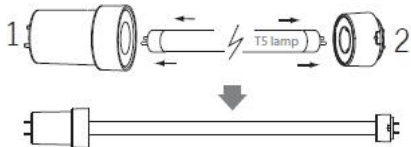


- 2) Switch-off the lighting system;
- 3) Remove the existing T8/T10/T12 lamp from the lighting system;
- 4) Remove the existing Starter from the lighting system and insert the Fuse into the Lamp Fixtures Starter Socket;



- 5) Insert the assembled T5 lamp and ballast into the existing lighting system as shown. Be sure to place the Main Ballast Unit to the LIVE side of the fixture;

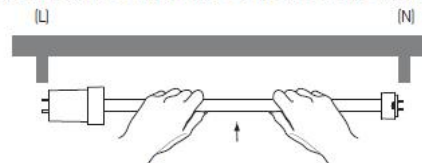

- 6) You can now switch on the lamp;
- 7) Ensure the RED LED light on the Remote-End Connector is NOT lit. If it is lit, rotate the lamp and product through 180° so that the LED light goes out.



**Warning**

If the RED LED light is lit, it indicates that the assembly is incorrectly installed. You should immediately rotate the product to the correct orientation as explained in step 7 above. Failure to do this will result in damage to the ballast unit which will lead to the product failing.