


SAFETY & COMPLIANCE

Read all instructions and safety information before use.
 For important safety and regulatory compliance information, see the
 Installation and User Guide (www.saveiteasy.co.uk/downloads/installation-guides)

Applicable products : PRO-6-052

PRODUCT AND PARTS

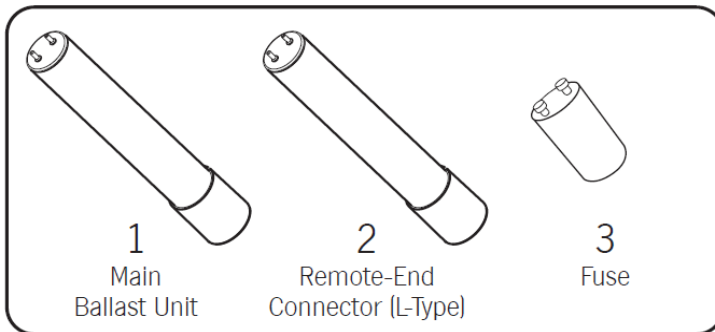


These instructions only apply to installation in standard switch-start fittings. For any other situations (quick start, electronic, emergency or any form of lighting control or sensors), please contact your local dealer for technical support or visit: www.saveiteasy.co.uk/downloads/installation-guides




SIMPLE SETUP


- 1) Connect the Main Ballast Unit to one side of the T5 lamp (the side with printing on the glass), and then connect the Remote-End Connector to the other side of the T5 lamp.

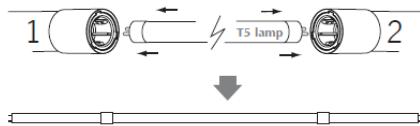

- 5.) Insert the assembled T5 lamp and ballast into the existing lighting system as shown.

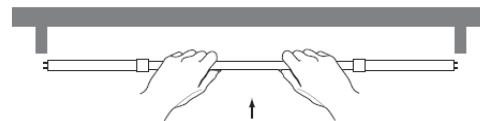

- 2.) Switch-off the lighting system;
- 3.) Remove the existing T8/T10/T12 lamp from the lighting system;
- 4.) Remove the existing Starter from the lighting system and insert the Fuse into the Lamp Fixtures Starter Socket;



- 6.) You can now switch on the lamp;
- 7.) If Necessary, fit the supplied Common Mode Choke to the light fitting as shown in the full installation guide.